

WIRING SCHEMATIC


P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12

LENGTH TABLE

OCP PART NO.	LENGTH
16-10030-01	1M
16-10030-02	2M
16-10030-03	3M
16-10030-05	5M
16-10030-10	10M

THIS PRODUCT CONTAINS PROPRIETARY INFORMATION OF OCP GROUP, INC. AND IS SUBJECT TO THE CONDITIONS THAT THE INFORMATION: (A) BE RETAINED IN CONFIDENCE, (B) NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART, (C) NOT BE USED INCORPORATED IN ANY PRODUCT EXCEPT ON AN EXPRESS WRITTEN AGREEMENT WITH OCP GROUP, INC.

REVISIONS				
DATE	REV	AREA	DESCRIPTION	APP'D
11/08	A	-	INITIAL RELEASE	C/JG

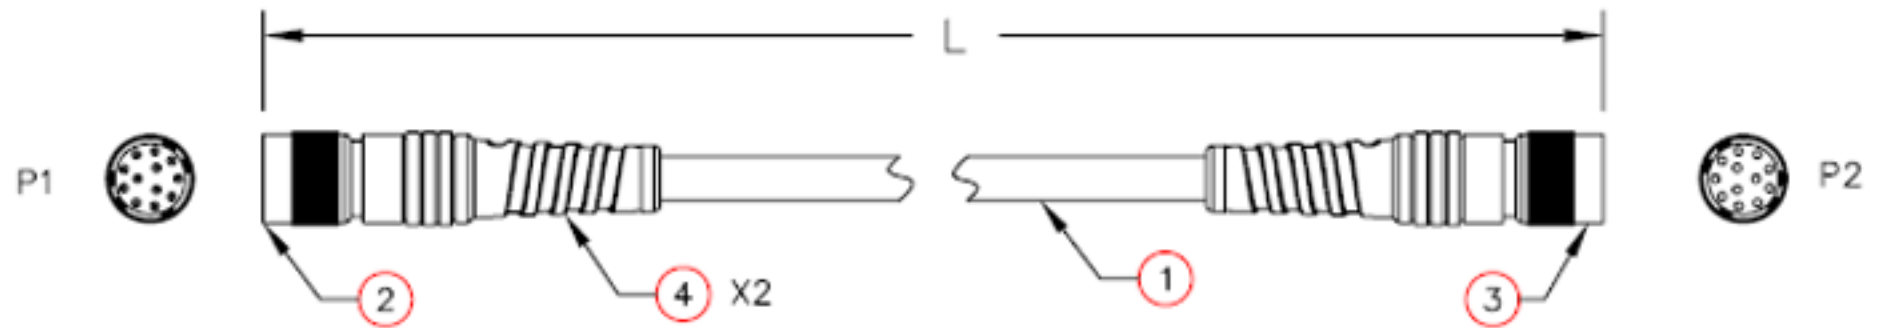

ITEM	DESCRIPTION/REMARKS	QTY	UNLESS OTHERWISE SPECIFIED	ocp		TITLE
5			CABLE TOLERANCE			HIFLEX, CCXC12 PIN PATCH CABLE, MALE CONNECTOR TO FEMALE CONNECTOR
4	OVERMOLD: LOW DENSITY POLYETHYLENE AND POLYVINYL CHLORIDE (PVC), COLOR BLACK	1	LENGTH +/- 3%			
3	CONNECTOR, FEMALE, 12P	1	CONNECTOR TOLERANCE	SCALE: FREE	DATE: 11/03/08	OCP PART NO.: 16-10030-XX
2	CONNECTOR, MALE, 12P	1	.XXX± LINEAR	UNITS: METERS	CHK'D: C/JG	CUSTOMER: TBD
1	BULK CABLE, HI-FLEX, 24AWG	A/R	.XX± LINEAR	DRAWN BY: LAO	APP'D: MC	SIZE: A
						DRAWING NUMBER: 16-10030-XX
						REV: A
						SHEET: 1/1