


REVISIONS		
Rev.	DESCRIPTION	DATE
A	INITIAL RELEASE	3/23/16

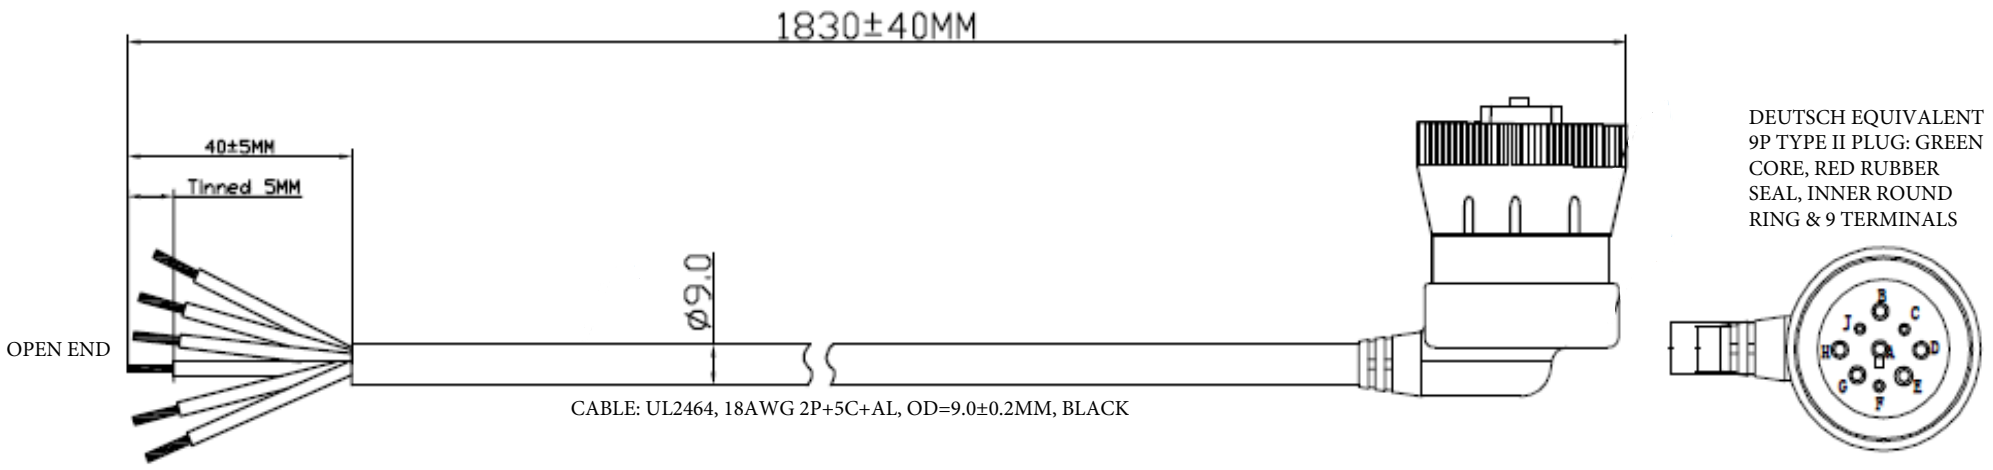

CABLE: UL2464, 18AWG 2P+5C+AL, OD=9.0±0.2MM, BLACK

DEUTSCH EQUIVALENT
9P TYPE II PLUG: GREEN
CORE, RED RUBBER
SEAL, INNER ROUND
RING & 9 TERMINALS

PIN ASSIGNMENT

Plug	Open
H — purple	purple
J — blue	blue
A — gray	gray
E — black	black
B — red	red
D — yellow	yellow
C — green	green
G — brown	brown
F — orange	orange

TESTING

1. Any Open, Short Miswiring & Intermittent are not permitted.
2. Contact Resistance: 5 Ω.
3. Insulation Resistance: 5MΩ/300V DC MIN.
4. This product is RoHS compliant.

<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS [INCH] TOLERANCE ARE: X ±0.5 ANGULAR ±0.5° XX ±0.20 XXX ±0.1000</small>	<small>DRAWN BY:</small> JOE PEREZ		
	<small>CHECKED BY:</small>		
<small>APPROVED BY:</small> O. Acuña	<small>TITLE:</small> CAN II J1939 PLUG R.ANGLE 6FT TO FLY AWAY LEADS		
<p>PROPRIETARY AND CONFIDENTIAL</p> <small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OCP GROUP INC. PARTIAL OR TOTAL REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF OCP GROUP INC IS PROHIBITED.</small>	<small>OC P/N:</small> 11760-03-206		
	<small>DRAWING NO:</small>	<small>REV:</small> A	
	<small>UNITS:</small> MM	<small>SCALE:</small> FREE	<small>SIZE:</small> A4