



REVISIONS		
Rev.	DESCRIPTION	DATE
A	Initial Release	19 Aug, 2019

- Drawing And Dimensions**
- Current Rating: 10 Amp
 - Environment: Abrasion/Oil/Gas/Chemical Resistant.
-40c~90c, IP67
 - Bulk Cable is J1939 CAN II Compliant



Front View

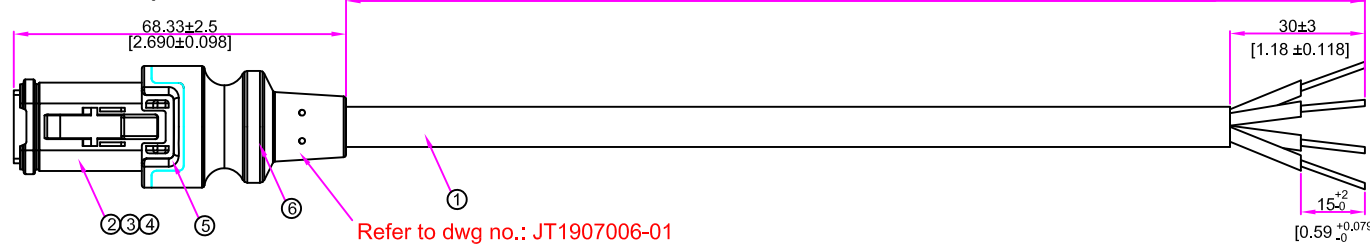

Refer to dwg no.: JT1907006-01

[Stripped, Twisted & Tinned]
max.diameter after tinning:1.5mm

Table 1

Table2. Wiring diagram:

P1	Color wire	P2
1	Black	Stripped, Twisted & Tinned
2	Red	Stripped, Twisted & Tinned
3	White	Stripped, Twisted & Tinned
4	Green	Stripped, Twisted & Tinned
N/C	Drain	N/C

Assemble wedges on both ends after overmolding.
(dimension not including wedge)

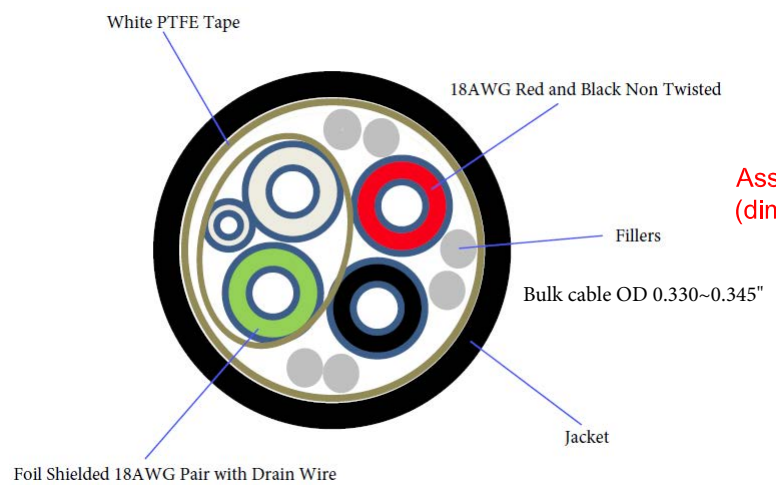


Table 1	
OCP P/N	LENGTH
11760-03-430-03	3000+50/-0 mm
11760-03-430-05	5000+100/-0 mm

ELECTRICAL CHARACTERISTICS:

- Contact resistance:<1Ω
- Insulation resistance:500V/DC,>50MΩ
- All cable assemblies to be 100% tested for continuity,short & miswire.

NOTES:

- All the materials used comply to RoHS Directive 2011/65/EU and amendment 2015/863/EU.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN <u>MILLIMETERS</u> [INCHES]	DRAWN BY Allan Xue		CONNECT WITH CONFIDENCE	
	CHECKED BY Elsa Zhang		OCP CHINA P/N: 016-CD-0538	TITLE: Deutsch DT06-4S IP67 Molded Cable, 3M, Stripped and Tinned
TOLERANCES ARE: MILLIMETERS .X ±0.5 .XX ±0.20 .XXX ±0.10	INCHES .XX ±0.02 .XXX ±0.008 .XXXX ±0.004	APPROVED BY Jay Chow	OCP P/N: 11760-03-430-XX	PROJECT NO.: PJ1906030
ANGULAR ±1°	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OCP CHINA. PARTIAL OR TOTAL REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF OCP CHINA IS PROHIBITED	CUSTOMER P/N: -	CUSTOMER REV.LEVEL: -	DRAWING NO.: JT1907006 REV.: A
			CUSTOMER NAME: -	SCALE: Free SIZE: A4 SHEET 1 OF 1