


WIRING SCHEMATIC

USB3.0 AM	USB3.0 AF	COLOR
1	1	RED
2	2	WHITE
3	3	GREEN
4	4	BLACK
5	5	YELLOW
6	6	BLUE
7	7	DRAIN
8	8	ORANGE
9	9	PURPLE
SHELL	SHELL	BRAID

RECOMMENDED PANEL CUTOUT

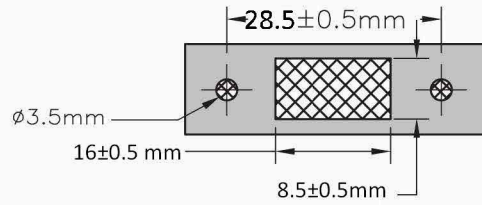



THIS PRODUCT CONTAINS PROPRIETARY INFORMATION OF OCP GROUP, INC. AND IS SUBJECT TO THE CONDITIONS THAT THE INFORMATION: (A) BE RETAINED IN CONFIDENCE. (B) NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART. (C) NOT BE USED INCORPORATED IN ANY PRODUCT EXCEPT ON AN EXPRESS WRITTEN AGREEMENT WITH OCP GROUP, INC.

REVISIONS

REV	ECN	DATE	DESCRIPTION	APP'D
A	-	8/13/10	INITIAL RELEASE	CJG
B	-	4/17/15	CHANGED COLOR FROM BLUE TO BLACK	OA

LENGTH TABLE

PART NO.	LENGTH
62-00191-01	1FT
62-00191-03	3FT
62-00191-06	6FT

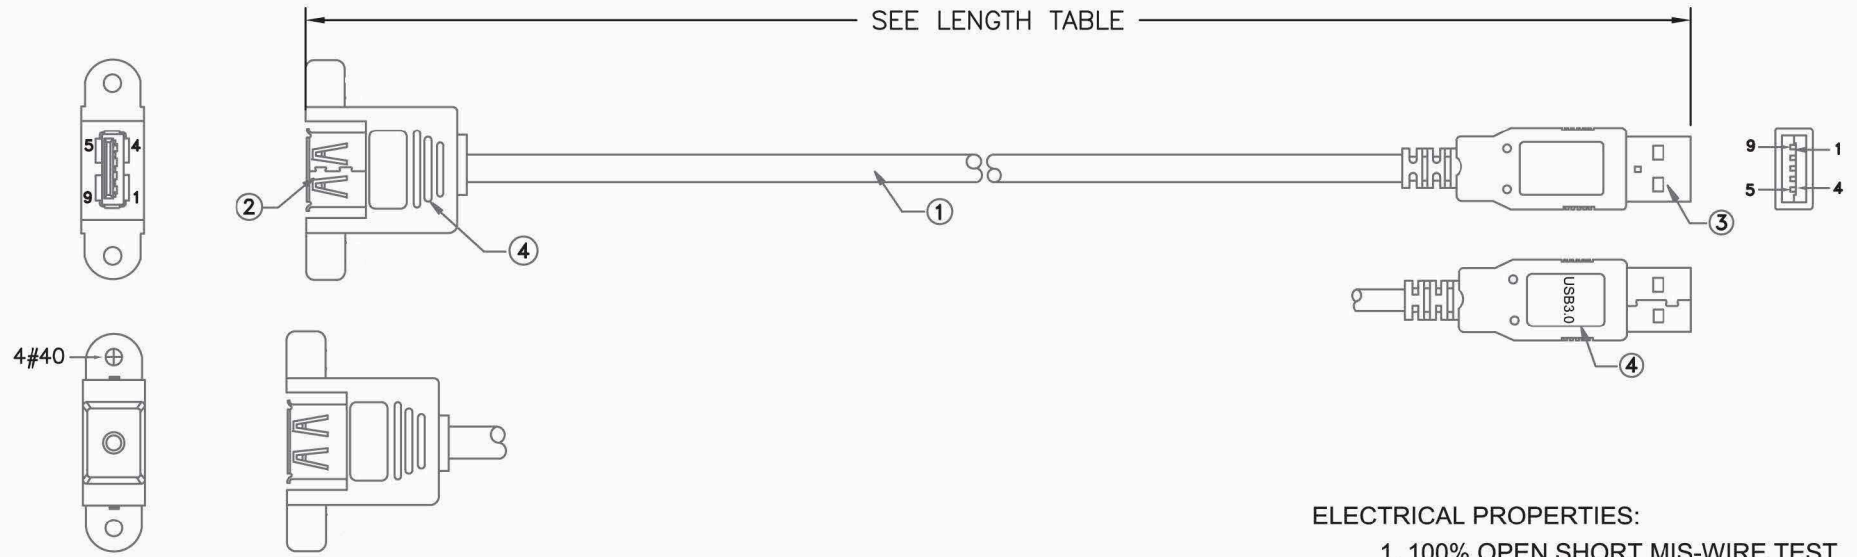


ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. CONTACT RESISTANCE: 10 OHM.
3. INSULATION RESISTANCE: 5MEGA OHM.
4. HIPOT TEST: 300V/10MS.

ITEM	DESCRIPTION/REMARKS	QTY
6		
5	SCREW 4#-40 PLATED: NICKEL	2
4	PVC MOLD BLACK	
3	USB3.0 A TYPE MALE SHELL PLATED: NICKEL CONTACT: G/F	1
2	USB3.0 A TYPE FEMALE SHELL PLATED: NICKEL CONTACT: G/F	1
1	USB 3.0 CABLE, 28AWG*1PAIR+(28AWG*1PAIR+D+F-AL)*2PCS+24AWG*2C+AMA BRAID, OD 5.8mm JACKET BLACK.	1

UNLESS OTHERWISE SPECIFIED	
CABLE TOLERANCE	
LENGTH +/- 3%	
CONNECTOR TOLERANCE	
.XXX±	LINEAR
.XX±	LINEAR



SCALE: NTS DATE: 08/13/10
 UNITS: mm CHK'D: CJG
 DRAWN BY: DLG APP'D: CJG

TITLE: USB 3.0 Panel Mount Extension			
OCP PART NO.: 62-00191-XX			
CUSTOMER:			
SIZE: A	DRAWING NUMBER: 62-00191-XX	REV: B	SHEET: 1/1