


WIRING SCHEMATIC

P1	COLOR	P2
1	YELLOW (+12V)	13+14+15
2	BLACK (GND)	10+11+12
3	BLACK (GND)	4+5+6
4	RED (+5V)	7+8+9

THIS PRODUCT CONTAINS PROPRIETARY INFORMATION OF OASIS COMPUTER PRODUCTS INC. AND IS SUBJECT TO THE CONDITIONS THAT THE INFORMATION: (A) BE RETAINED IN CONFIDENCE. (B) NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART. (C) NOT BE USED INCORPORATED IN ANY PRODUCT EXCEPT ON AN EXPRESS WRITTEN AGREEMENT WITH OASIS COMPUTER PRODUCTS INC.

REVISIONS				
REV	ECN	AREA	DESCRIPTION	APP'D
A	-	-	INITIAL RELEASE	KW

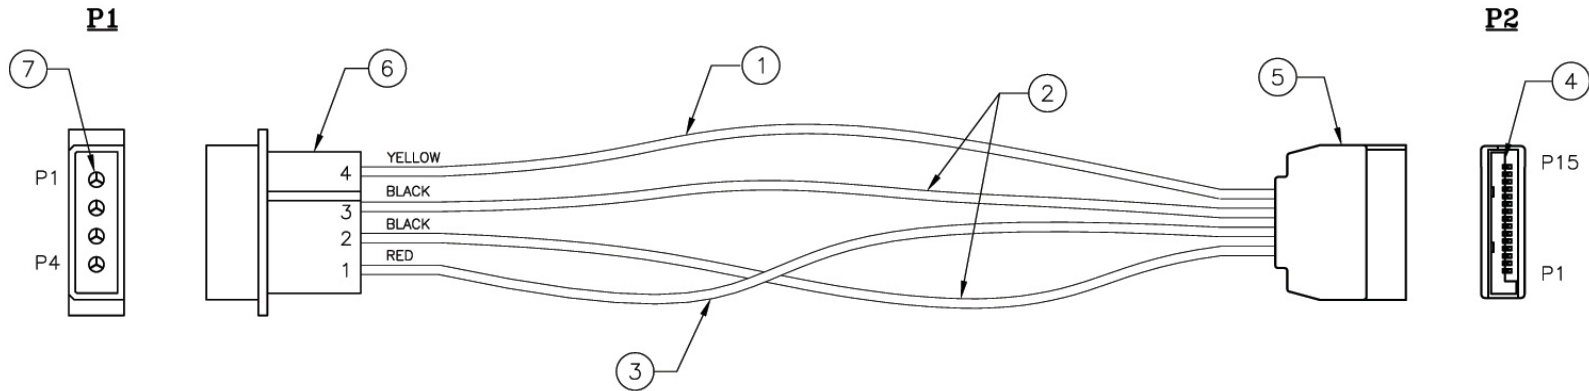

PART NUMBER: 74-IPC012-XXX

74-IPC012-001 = 6"
74-IPC012-002 = 12"

(CUSTOM LENGTHS AVAILABLE UPON REQUEST)

NOTE:

1. ELECTRICAL TEST
 - 1.1 100% OPEN, SHORT TEST
 - 1.2 INSULATION RESISTANCE: 1 MEGAOHM MIN.

7	TERMINAL FOR PITCH 5.08MM HOUSING, TIN PLATED	4	UNLESS OTHERWISE SPECIFIED
6	PITCH 5.08MM 4 POSITION HOUSING	1	CABLE TOLERANCE
5	HOOD, PVC OVERMOLD, BLACK	1	UP TO 12" .5"
4	SERIAL ATA 15 POSITION POWER FEMALE CONNECTOR	1	ABOVE 12" .75"
3	UL1007 22AWG WIRE, RED	A/R	ABOVE 24" 5%
2	UL1007 22AWG WIRE, BLACK	A/R	ANGLES = ± 1/2 DEGREE
1	UL1007 22AWG WIRE, YELLOW	A/R	CONNECTOR TOLERANCE
ITEM	DESCRIPTION/REMARKS	QTY	.XXX± LINEAR .XX± LINEAR



TITLE: **SERIAL ATA TO ATX POWER CABLE**

OCP PART NO.: 74-IPC012-XXX

CUSTOMER: T8D

SCALE: NTS DATE: 3/11/04
UNITS: INCH CHK'D: KW
DRAWN BY: OA APP'D: KW

SIZE	DRAWING NUMBER:	REV	SHEET
A	74-IPC012-XXX	A	1/1