


WIRING SCHEMATIC

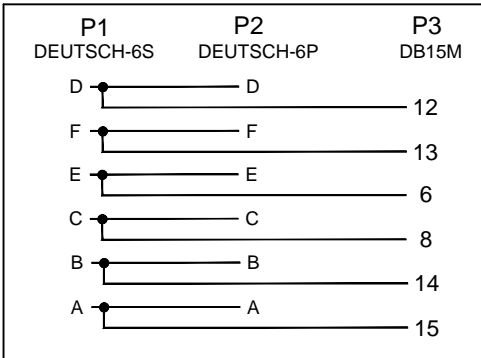

THIS PRODUCT CONTAINS PROPRIETARY INFORMATION OF OCP GROUP, INC. AND IS SUBJECT TO THE CONDITIONS THAT THE INFORMATION: (A) BE RETAINED IN CONFIDENCE. (B) NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART. (C) NOT BE USED INCORPORATED IN ANY PRODUCT EXCEPT ON AN EXPRESS WRITTEN AGREEMENT WITH OCP GROUP, INC.


REVISIONS

REV	ECN	AREA	DESCRIPTION	APP'D
A	-	-	INITIAL RELEASE	CJG

D

C

B

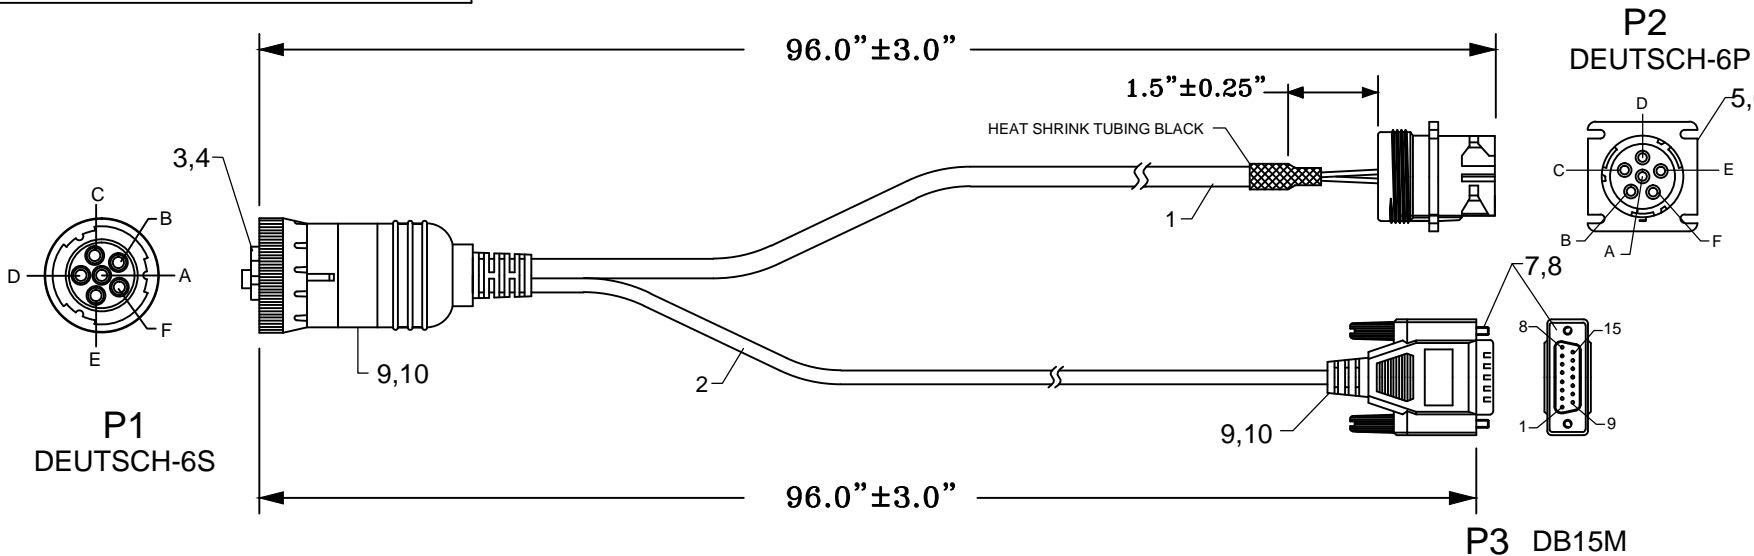

1.ELECTRICAL TEST:

- <1>100% OPEN / SHORT&MISS WIRE TEST
- <2>INSULATION RESISTANCE:DC 100V 10ms 5M ohm(MIN).
- <3>CONTACT RESISTANCE:2 ohm<MAX>.

10	Black PVC 50P Molding	A/R
9	PE Molding	A/R
8	#4-40 Screw	2
7	D-SUB 15P Male Plug	1
6	1060-12-0166 Terminal	6
5	Deutsch-6 Pin Male Housing	1
4	1062-12-0166 Terminal	6
3	Deutsch-6 Pin Female Housing	1
2	UL2464,24AWG,6C+Drain,AL/Foil shielding, Jacket in Black.	1
1	UL2464,20AWG,6C+Drain,AL/Foil shielding, Jacket in Black.	1
ITEM	DESCRIPTION/REMARKS	QTY

UNLESS OTHERWISE SPECIFIED
CABLE TOLERANCE
LENGTH +/- 3%
CONNECTOR TOLERANCE
.XXX± LINEAR
.XX± LINEAR



SCALE: NTS DATE: 12/28/10
 UNITS: INCH CHK'D: CJG
 DRAWN BY: DLG APP'D: CJG

TITLE:	Deutsch 6-Pin Male to Female		
OCP PART NO.:	11760-03-150		
CUSTOMER:	OCP Aftermarket product		
SIZE	DRAWING NUMBER:	REV	SHEET
A	11760-03-150	A	1/1

D

C

B

A

4

3

2

1