



# WIRING SCHEMATIC

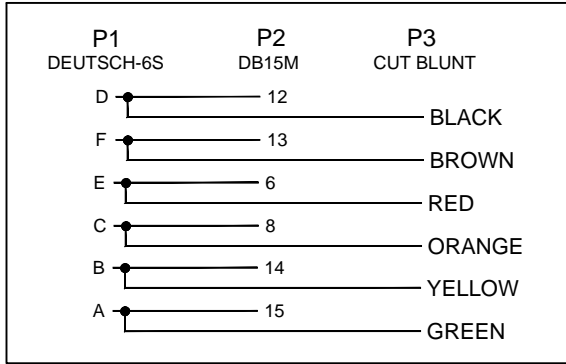

THIS PRODUCT CONTAINS PROPRIETARY INFORMATION OF OCP GROUP, INC. AND IS SUBJECT TO THE CONDITIONS THAT THE INFORMATION: (A) BE RETAINED IN CONFIDENCE. (B) NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART. (C) NOT BE USED INCORPORATED IN ANY PRODUCT EXCEPT ON AN EXPRESS WRITTEN AGREEMENT WITH OCP GROUP, INC.

REVISIONS				
REV	ECN	AREA	DESCRIPTION	APP'D
A	-	-	INITIAL RELEASE	CJG

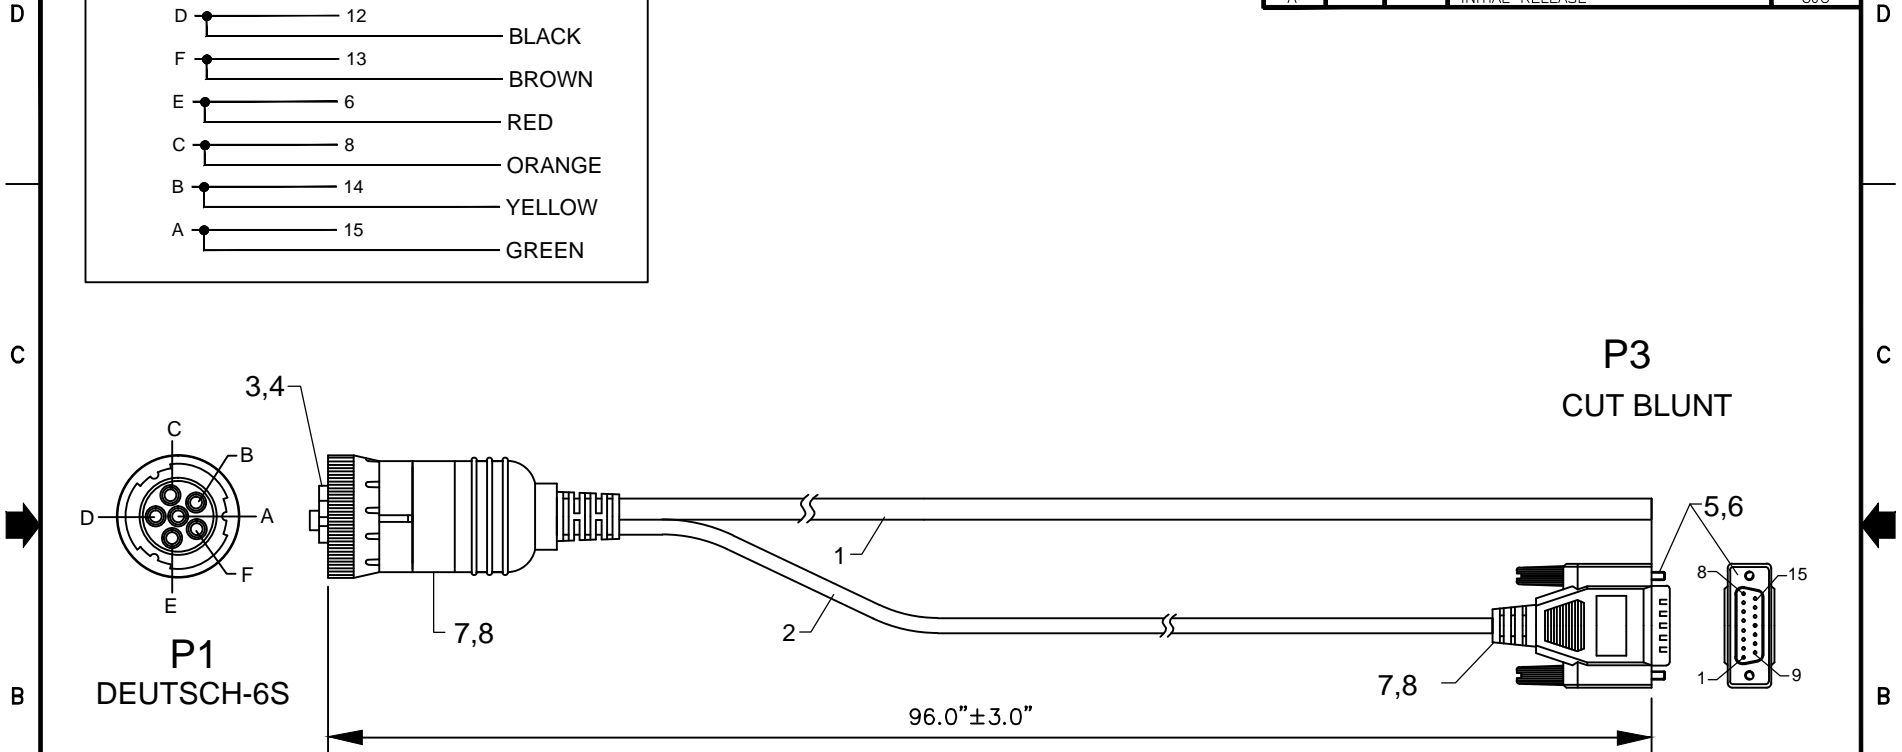

1.ELECTRICAL TEST:  
 <1>100% OPEN / SHORT&MISS WIRE TEST  
 <2>INSULATION RESISTANCE:DC 100V 10ms 5M ohm(MIN).  
 <3>CONTACT RESISTANCE:2 ohm<MAX>.

ITEM	DESCRIPTION/REMARKS	QTY
8	Black PVC 50P Molding	A/R
7	PE Molding	A/R
6	#4-40 Screw	2
5	D-SUB 15P Male Plug	1
4	Terminal	6
3	Deutsch-6 Pin Female Housing	1
2	UL2464,24AWG,9C+Drain,AL/Foil shielding, Jacket in Black. 8 FT	1
1	UL2464,20AWG,9C+Drain,AL/Foil shielding, Jacket in Black. 8 FT	1

UNLESS OTHERWISE SPECIFIED
CABLE TOLERANCE
LENGTH +/- 3%
CONNECTOR TOLERANCE
.XXX± LINEAR
.XX± LINEAR

SCALE: NTS DATE: 12/28/10  
 UNITS: INCH CHK'D: CJG  
 DRAWN BY: DLG APP'D: CJG

TITLE: Deutsch 6-Pin to DB15, Blunt end cut			
OCP PART NO.: 11760-03-125			
CUSTOMER: OCP Aftermarket product			
SIZE	DRAWING NUMBER:	REV	SHEET
A	11760-03-125	A	1/1